


SOT-23 Plastic-Encapsulate MOSFETS

Features

- P-Channel 1.8-V (G-S) MOSFET

MECHANICAL DATA

- Case style:SOT-23molded plastic
- Mounting position:any

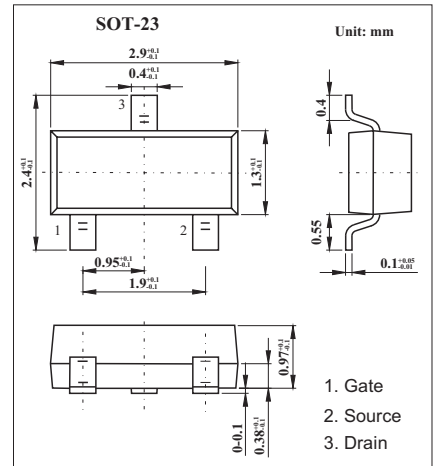

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	5 sec	Steady State	Unit
Drain-Source Voltage	V _{DS}		-12	V
Gate-Source Voltage	V _{GS}		±8	V
Continuous Drain Current (T _J =150 °C)	I _D	-3.85	-3.0	A
		-3.0	-2.45	
Pulsed Drain Current	I _{DM}		-12	A
Continuous Source Current (diode conduction) *2	I _S	-1.0	-0.62	A
Power Dissipation	P _D	1.19	0.75	W
		0.76	0.48	
Junction Temperature	T _j		150	°C
Storage Temperature	T _{stg}		-55 to +150	°C

* Surface Mounted on FR4 Board.
Thermal Resistance Ratings Ta = 25 C

Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient *1	R _{thJA}	85	105	C/W
Maximum Junction-to-Ambient *2 Steady State		130	166	
Maximum Junction-to-Foot (Drain) Steady State	R _{thJF}	60	75	

* 1. Surface Mounted on FR4 Board, t ≤ 5 sec.
* 2. Surface Mounted on FR4 Board.

MOSFET ELECTRICAL CHARACTERISTICS Ta=25 °C unless otherwise specified

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = -10 μA	-12			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-0.45		-0.9	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±8 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -12 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -12 V, V _{GS} = 0 V, T _J = 55 °C			-10	
On-State Drain Current	I _{D(on)}	V _{DS} ≤ -5 V, V _{GS} = -4.5 V	-6			A
		V _{DS} ≤ -5 V, V _{GS} = -2.5 V	-3			
Drain-Source On-State Resistance	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -3.85 A		0.040	0.050	Ω
		V _{GS} = -2.5 V, I _D = -3.4 A		0.05	0.065	
		V _{GS} = -1.8V, I _D = -2.7 A		0.071	0.100	
Forward Transconductance	g _{fs}	V _{DS} = -5 V, I _D = -3.85 A		7		S
Diode Forward Voltage	V _{SD}	I _S = -1.6 A, V _{GS} = 0 V			-1.2	V
Total Gate Charge	Q _g			8	15	nC
Gate-Source Charge	Q _{GS}	V _{DS} = -6V, V _{GS} = -4.5 V, I _D = -3.85 A		1.1		
Gate-Drain Charge	Q _{gd}			2.3		
Input Capacitance	C _{iss}			715		pF
Output Capacitance	C _{oss}	V _{DS} = -6V, V _{GS} = 0, f = 1 MHz		275		
Reverse Transfer Capacitance	C _{rss}			200		
Turn-On Time	t _{d(on)}			15	20	ns
	t _r	V _{DD} = -6V, R _L = 6Ω, I _D = -1A, V _{GEN} = -4.5V, R _G = 6Ω		35	50	
Turn-Off Time	t _{d(off)}			50	70	
	t _f			50	75	

* Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.

Marking	M5
---------	----