











A42 TRANSISTOR (NPN)

FEATURES

- Low Collector-Emitter Saturation Voltage
- High Breakdown Voltage


| Symbol | Parameter | Value | Unit |
|-----------------|---|----------|---------------|
| V_{CBO} | Collector-Base Voltage | 310 | V |
| V_{CEO} | Collector-Emitter Voltage | 305 | V |
| V_{EBO} | Emitter-Base Voltage | 5 | V |
| I_C | Collector Current -Continuous | 200 | mA |
| I_{CM} | Collector Current -Pulsed | 500 | mA |
| P_C | Collector Power Dissipation | 500 | mW |
| $R_{\theta JA}$ | Thermal Resistance from Junction to Ambient | 250 | $^{\circ}C/W$ |
| T_J | Junction Temperature | 150 | $^{\circ}C$ |
| T_{stg} | Storage Temperature | -55~+150 | $^{\circ}C$ |

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|---|---------------|---------------------------------|-----|-----|------|---------|
| Collector-base breakdown voltage | $V_{(BR)CBO}$ | $I_C=100\mu A, I_E=0$ | 310 | | | V |
| Collector-emitter breakdown voltage | $V_{(BR)CEO}$ | $I_C=1mA, I_B=0$ | 305 | | | V |
| Emitter-base breakdown voltage | $V_{(BR)EBO}$ | $I_E=100\mu A, I_C=0$ | 5 | | | V |
| Collector cut-off current | I_{CBO} | $V_{CB}=200V, I_E=0$ | | | 0.25 | μA |
| | I_{CEX} | $V_{CE}=100V, V_X=5V$ | | | 5 | μA |
| | | $V_{CE}=300V, V_X=5V$ | | | 10 | μA |
| Emitter cut-off current | I_{EBO} | $V_{EB}=5V, I_C=0$ | | | 0.1 | μA |
| DC current gain | $h_{FE(1)}$ | $V_{CE}=10V, I_C=1mA$ | 60 | | | |
| | $h_{FE(2)}$ | $V_{CE}=10V, I_C=10mA$ | 100 | | 300 | |
| | $h_{FE(3)}$ | $V_{CE}=10V, I_C=30mA$ | 75 | | | |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C=20mA, I_B=2mA$ | | | 0.2 | V |
| Base-emitter saturation voltage | $V_{BE(sat)}$ | $I_C=20mA, I_B=2mA$ | | | 0.9 | V |
| Transition frequency | f_T | $V_{CE}=20V, I_C=10mA, f=30MHz$ | 50 | | | MHz |

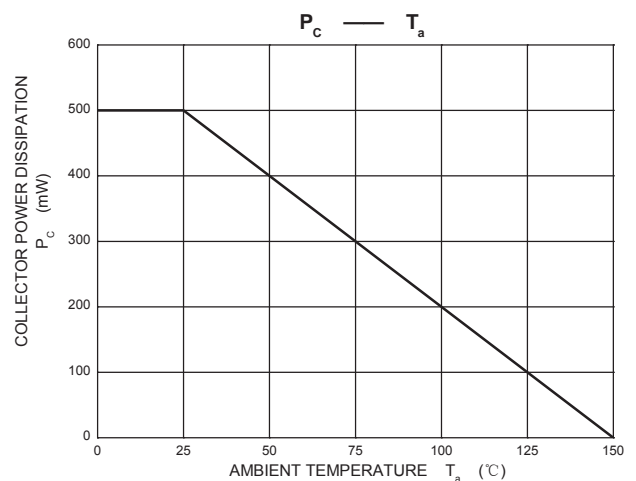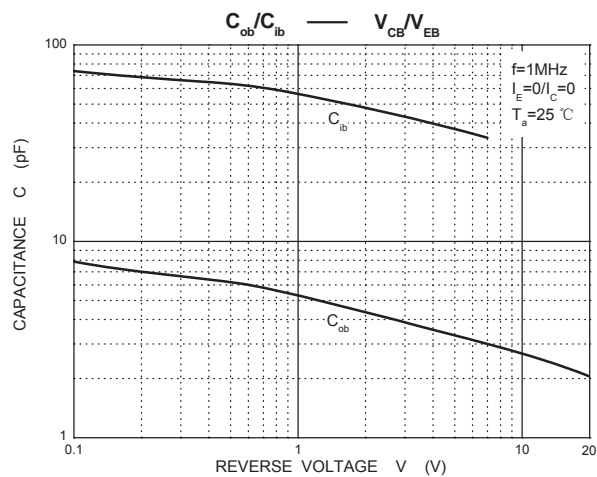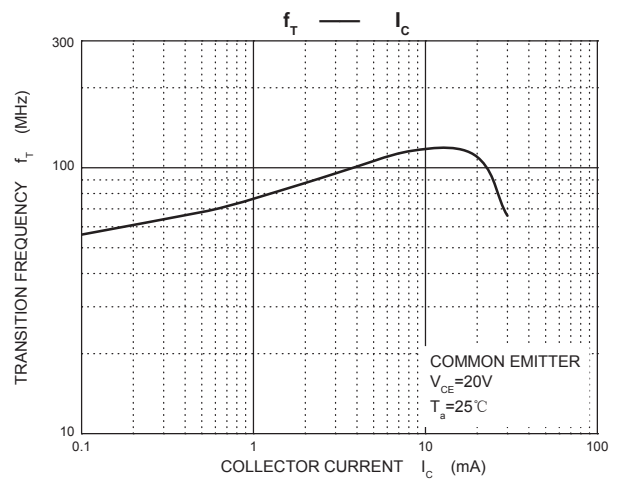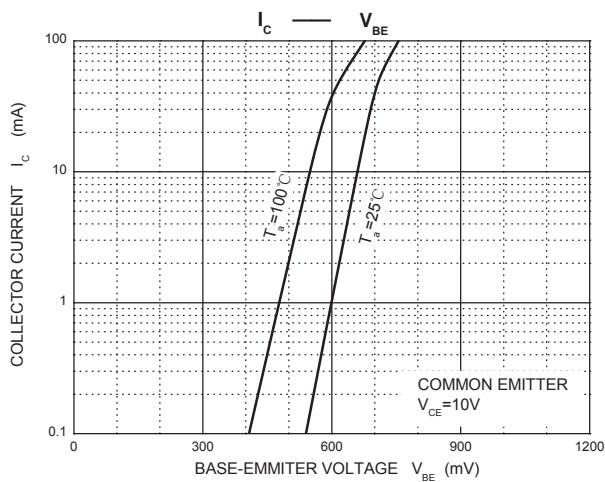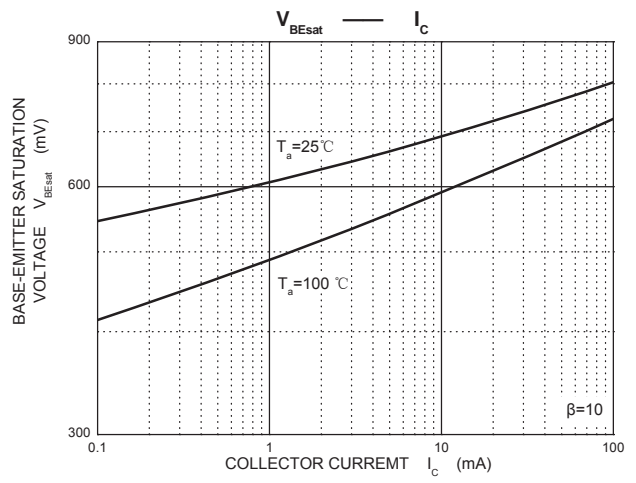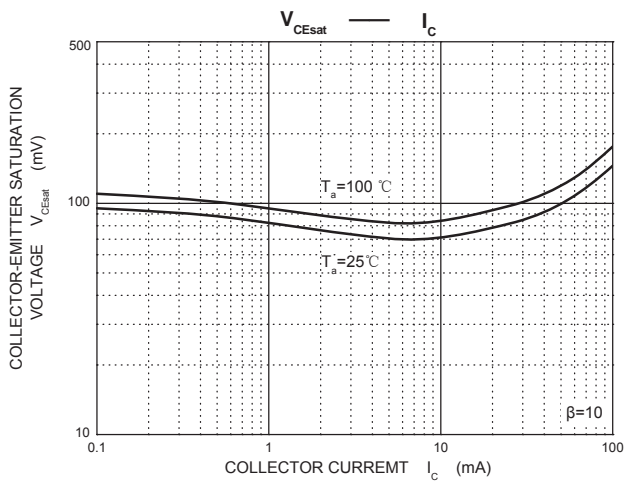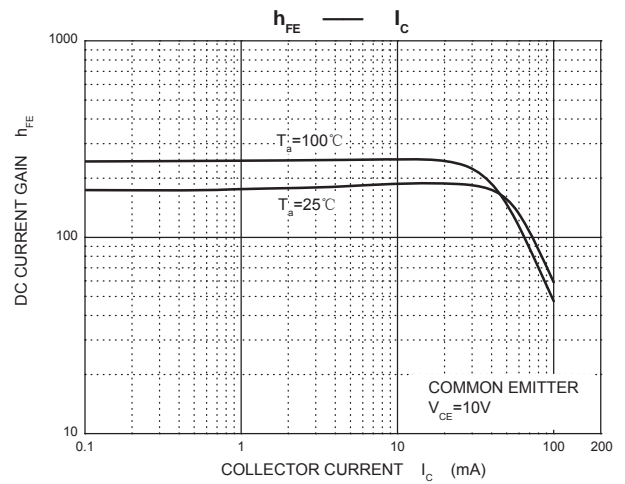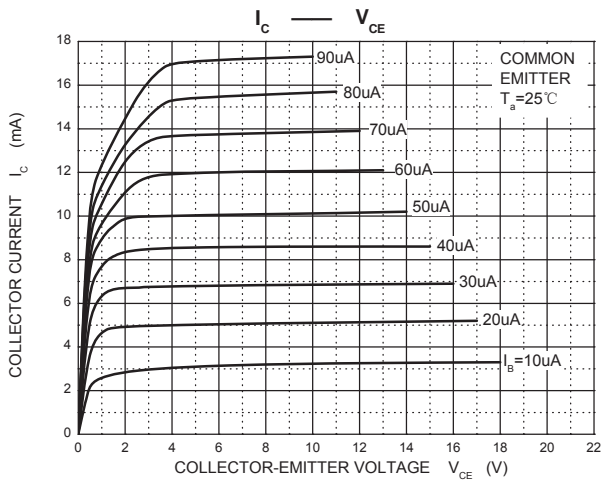

SOT-89-3L Tape and Reel


SOT-89-3L Embossed Carrier Tape

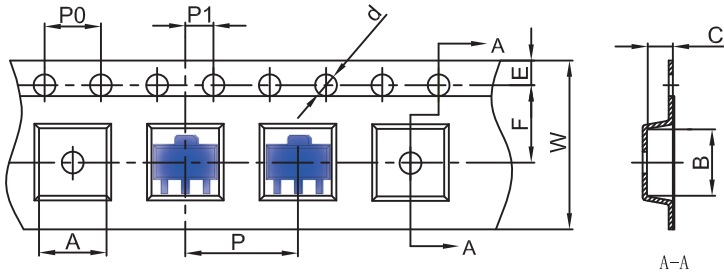


Packaging Description:
 SOT-89-3L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 1,000 units per 7" or 18.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter | | | | | | | | | | |
|------------------------------|------|------|------|-------|------|------|------|------|------|-------|
| Pkg type | A | B | C | d | E | F | P0 | P | P1 | W |
| SOT-89-3L | 4.85 | 4.45 | 1.85 | Ø1.50 | 1.75 | 5.50 | 4.00 | 8.00 | 2.00 | 12.00 |

SOT-89-3L Tape Leader and Trailer

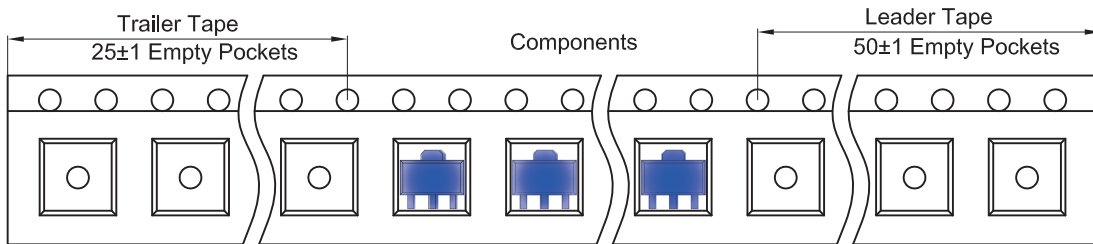

SOT-89-3L Reel

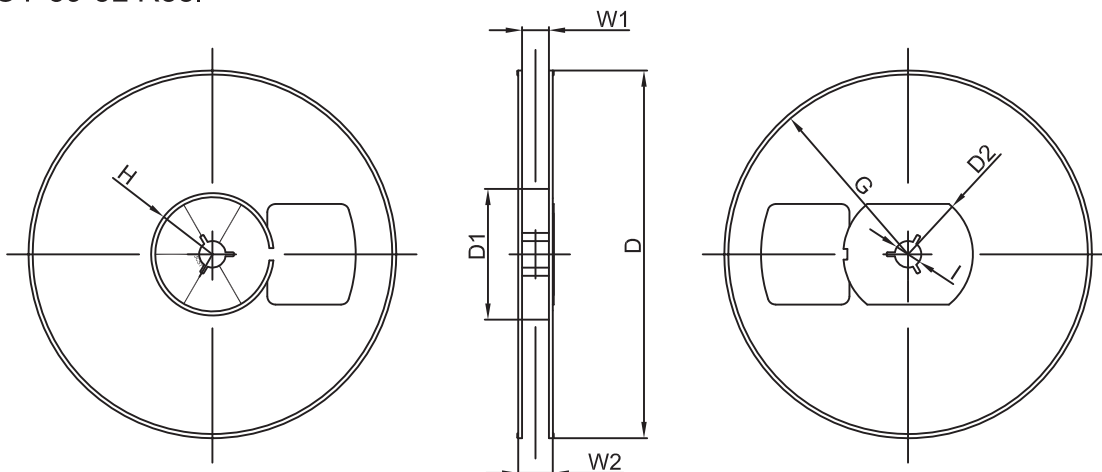

| Dimensions are in millimeter | | | | | | | | |
|------------------------------|---------|-------|--------|--------|--------|--------|-------|-------|
| Reel Option | D | D1 | D2 | G | H | I | W1 | W2 |
| 7" Dia | Ø180.00 | 60.00 | R32.00 | R86.50 | R30.00 | Ø13.00 | 13.20 | 16.50 |

| REEL | Reel Size | Box | Box Size(mm) | Carton | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|------------|-----------------|----------|
| 1000 pcs | 7 inch | 10,000 pcs | 203×203×195 | 40,000 pcs | 438×438×220 | |