

DB151(DF15005)---DB157(DF1510)


SILICON BRIDGE RECTIFIER

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- Rating to 1000V PRV
- Ideal for printed circuit board
- High temperature soldering guaranteed :260 °C/ 10s seconds at terminals
- Component in accordance to ROHS 2002/95/EC and WEEE2002/96/EC

MECHANICAL DATA

- Case:DB-1 molded plastic body
- Epoxy:UL94V-0 rate flame retardant
- Terminals:Plated leads solderable per MIL-STD-750,method 2026
- Mounting position:Any

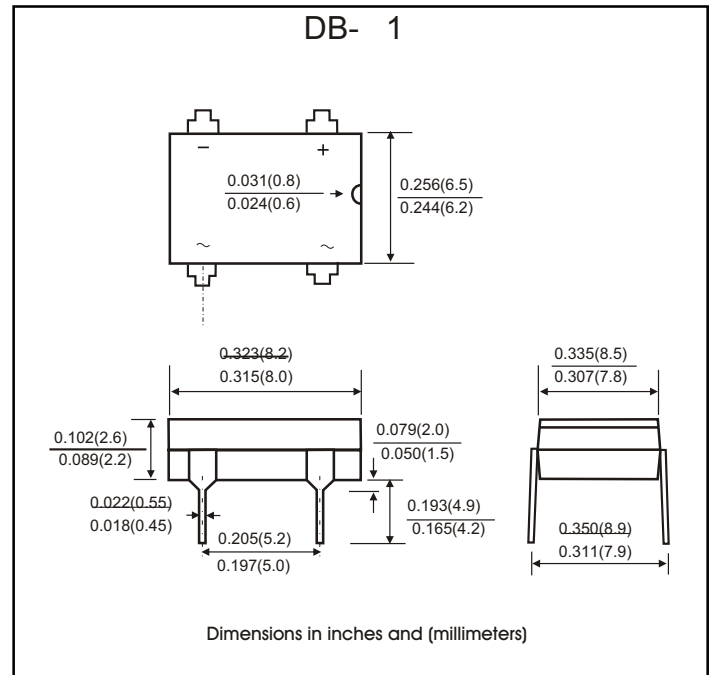

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		Symbols	DB151 DF 15005	DB152 DB153 DF 1501	DB154 DF 1502	DB155 DB DF 1504	56 DB157 DF 1506	DF 1508	DF 1510	Units
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current		$I(AV)$	1.5							Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I_{FSM}	50							Amps
Maximum Instantaneous Forward Voltage at 1.5 A DC		V_F	1.1							Volts
Maximum DC Reverse Current at rated DC blocking voltage	$T_A=25\text{ }^{\circ}\text{C}$	I_R	10							μA
	$T_A=125\text{ }^{\circ}\text{C}$		500							
Typical junction capacitance(Note 1)		C_J	25							pF
Typical thermal resistance(Note 2) Operating junction and storage temperature range		$R_{\theta A}$	40							K/W
		T_J T_{STG}	-55 to +150							$^{\circ}\text{C}$



RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

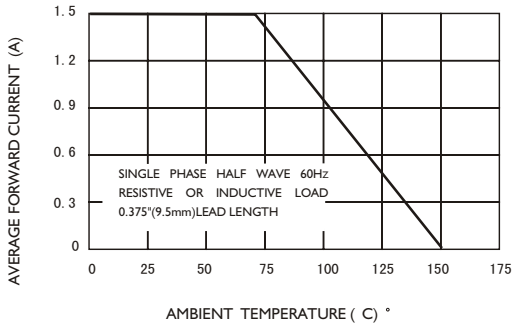


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

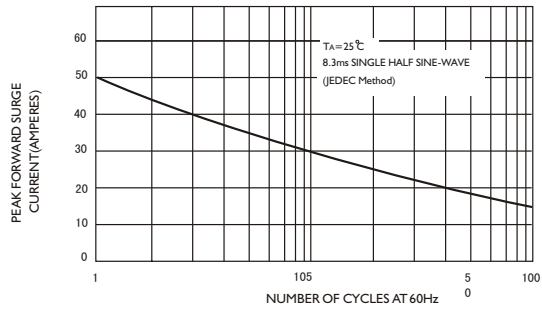


FIG.3-TYPICAL JUNCTION CAPACITANCE

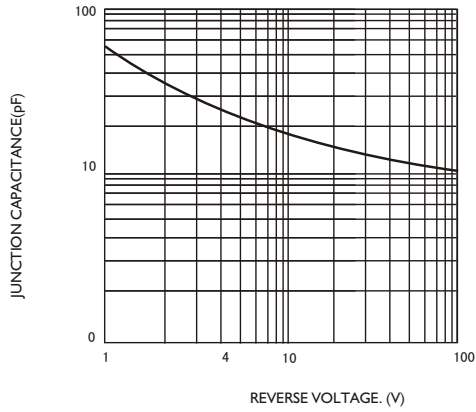


FIG.4-TYPICAL FORWARD CHARACTERISTICS

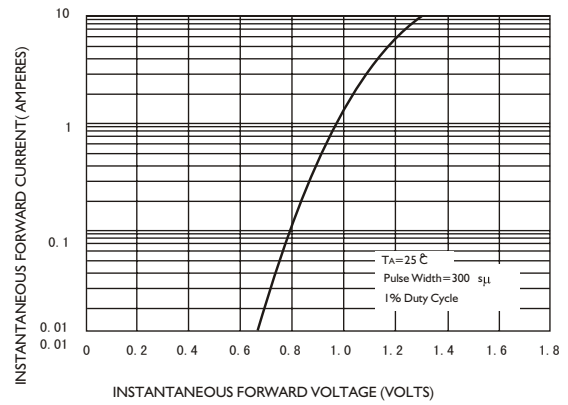


FIG.5-TYPICAL REVERSE CHARACTERISTICS

