

SUPER FAST RECTIFIERS


VOLTAGE RANGE: 50--- 600 V CURRENT: 3.0 A

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Super fast switching for high efficiency
- Low reverse leakage
- Built-in strain relief,ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:
250 C/10 seconds at terminals

MECHANICAL DATA

- Case: SMA molded plastic body
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any

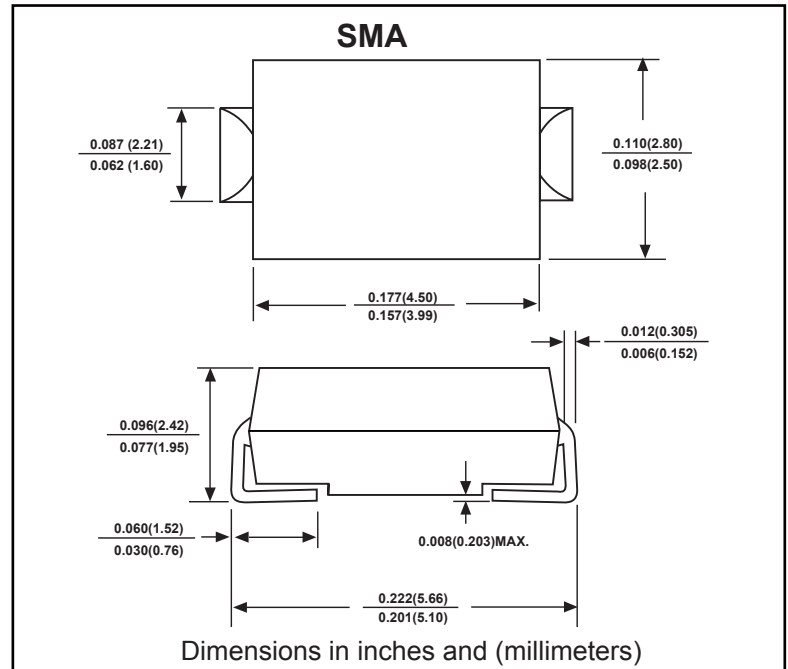

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate by 20%.

		ES3A	ES3B	ES3C	ES3D	ES3E	ES3G	ES3H	ES3J	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	560	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current, 375"(9.5mm) Lead Length at $T_A=55^{\circ}C$	$I_{F(AV)}$	3.0								A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100.0								A
Maximum Instantaneous Forward Voltage at 3.0A	V_F	1.0			1.3		1.7			V
Maximum reverse current at rated DC blocking voltage	@ $T_A=25^{\circ}C$	10.0								μA
	@ $T_A=100^{\circ}C$	100.0								
Maximum reverse recovery time (Note1)	t_{rr}	35.0								ns
Typical junction capacitance (Note2)	C_J	130.0								pF
Typical thermal resistance(Note3)	$R_{\theta JA}$	40.0								$^{\circ}C/W$
Operating junction temperature range	T_j	- 55 ---- + 125								$^{\circ}C$
Storage temperature range	T_{STG}	- 55 ---- + 150								$^{\circ}C$

Note: 1.Reverse recovery condition $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

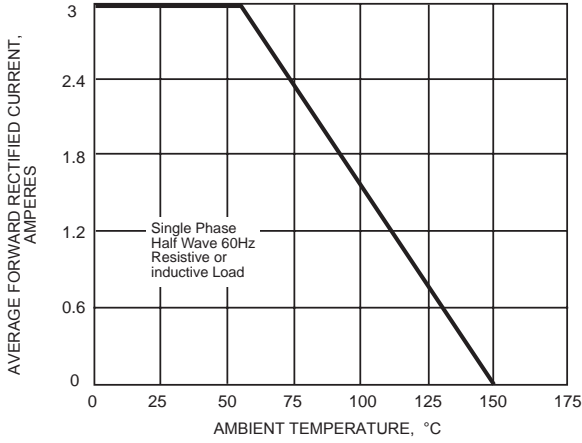


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

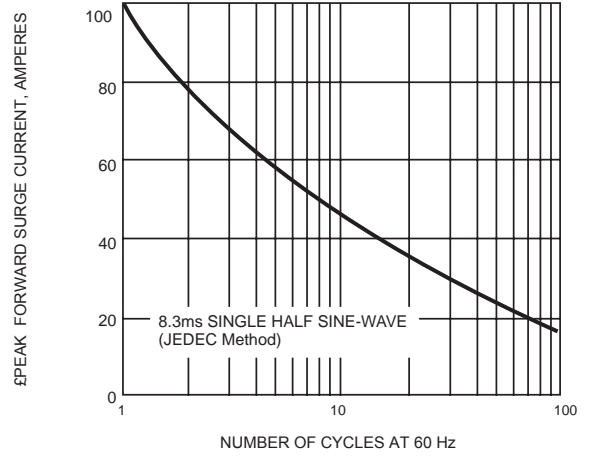


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

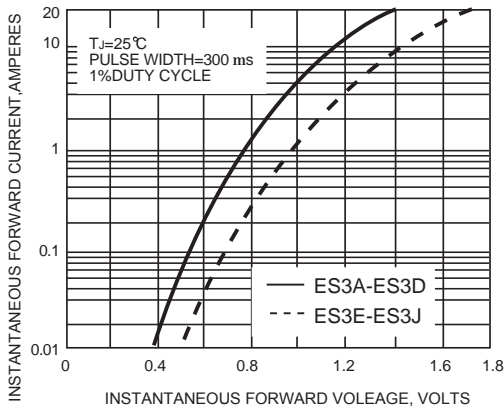


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

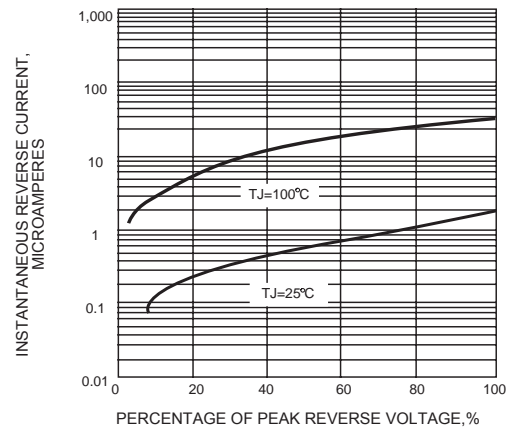


FIG. 5-TYPICAL JUNCTION CAPACITANCE

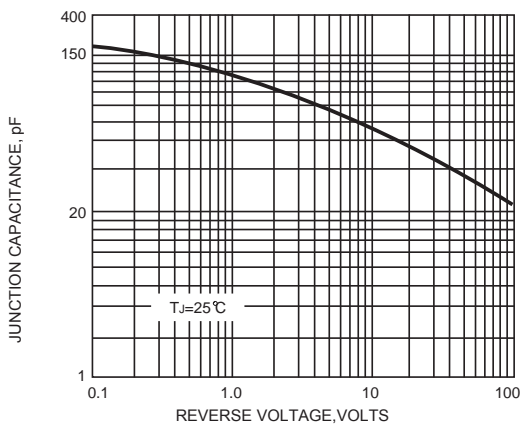


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

