

## SOT-89 Plastic-Encapsulate Transistors

### Features


- Epitaxial planar die construction
- Complementary to PXT2907A
- NPN Transistors

### MECHANICAL DATA

- Case style: SOT-89 molded plastic
- Mounting position: any

SOT-89

Unit:mm

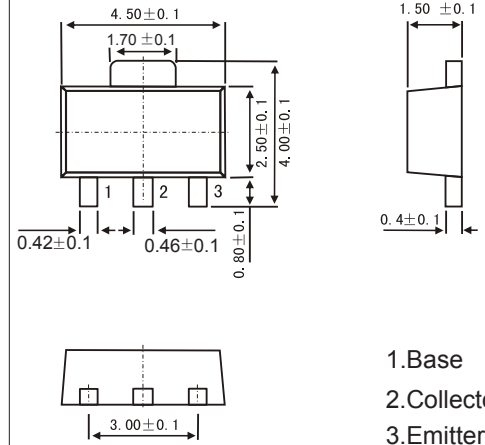

## MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	$V_{CB0}$	75	V
Collector - Emitter Voltage	$V_{CEO}$	40	
Emitter - Base Voltage	$V_{EBO}$	6	
Collector Current - Continuous	$I_c$	600	mA
Collector Power Dissipation	$P_c$	500	mW
Junction Temperature	$T_J$	150	°C
Storage Temperature Range	$T_{stg}$	-55 to 150	

### PACKAGE INFORMATION

Device	Package	Shipping
PXT2222A (KXT2222A)	SOT-89	1000/Tape&Reel

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	$V_{CB0}$	$I_c = 100 \mu A, I_E = 0$	75			V
Collector- emitter breakdown voltage	$V_{CEO}$	$I_c = 10 mA, I_B = 0$	40			
Emitter - base breakdown voltage	$V_{EBO}$	$I_E = 100 \mu A, I_C = 0$	6			
Collector-base cut-off current	$I_{CBO}$	$V_{CB} = 60 V, I_E = 0$			50	nA
Emitter cut-off current	$I_{EBO}$	$V_{EB} = 5 V, I_C = 0$			50	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 500 mA, I_B = 50 mA$			1	V
		$I_C = 500 mA, I_B = 15 mA$			0.3	
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C = 500 mA, I_B = 50 mA$			2	
		$I_C = 500 mA, I_B = 15 mA$		0.6	1.2	
	$h_{FE(1)}$	$V_{CE} = 10 V, I_c = 0.1 mA$	50			
	$h_{FE(2)}$	$V_{CE} = 10 V, I_c = 10 mA$	75			
	$h_{FE(3)}$	$V_{CE} = 10 V, I_c = 150 mA$	100		300	
	$h_{FE(4)}$	$V_{CE} = 1 V, I_c = 150 mA$	50			
	$h_{FE(5)}$	$V_{CE} = 10 V, I_c = 500 mA$	40			
Delay time	$t_d$	$V_{CC} = 30 V, I_c = 150 mA$			10	ns
Rise time	$t_r$	$V_{BE(off)} = 0.5 V, I_{B1} = 15 mA$			25	
Storage time	$t_s$	$V_{CC} = 30 V, I_c = 150 mA$			225	
Fall time	$t_f$	$I_{B1} = - I_{B2} = 15 mA$			60	
Collector output capacitance	$C_{ob}$	$V_{CB} = 10 V, I_E = 0, f = 1 MHz$			8	pF
Transition frequency	$f_T$	$V_{CE} = 10 V, I_c = 20 mA, f = 100 MHz$	300			MHz

### Marking

Marking	*1P
---------	-----



# RATINGS AND CHARACTERISTIC CURVES

## Typical Characteristics

