

## SCHOTTKY BARRIER RECTIFIER


VOLTAGE RANGE: 20--- 200 V    CURRENT: 1.0 A

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing
- For surface mounted applications
- Metal silicon junction,majority carrier conduction
- Low power loss,high efficiency
- Built-in strain relief,ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:260 °C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/Ec and WEEE 2002/96/EC

### MECHANICAL DATA

- Case: SMA molded plastic body
- Polarity:Color band denotes cathode end
- Mounting Position:Any

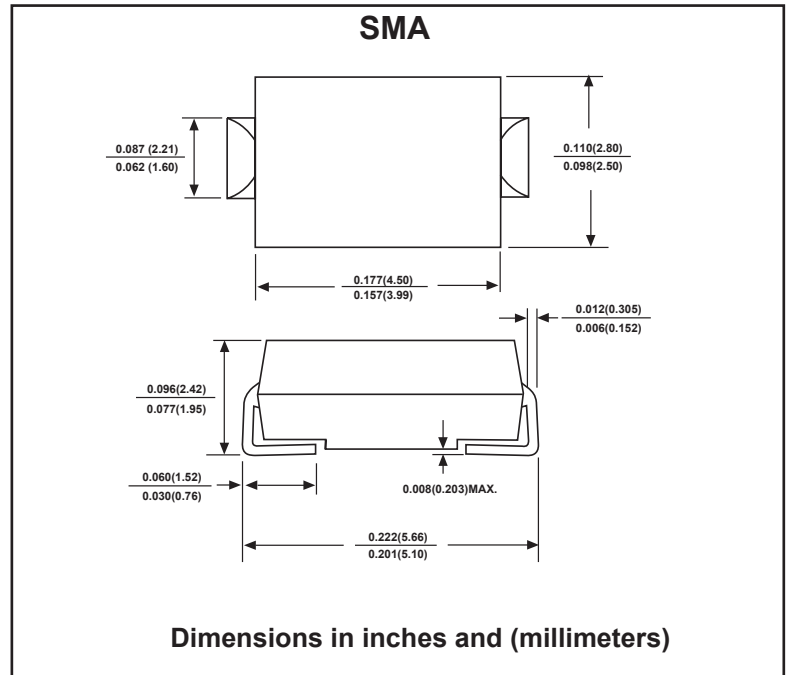

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)Single phase,half wave,60 Hz,resistive or inductive load.

For capacitive load,derate by 20%.


TYPE NUMBER	SYMBOL	SS12	SS13	SS14	SS15	SS16	SS18	SS110	SS115	SS120	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	V
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	V
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	V
Maximum Average Forward rectified Current0.375"(9.5mm) lead length	$I_{F(AV)}$	1.0									A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	30.0									A
Maximum instantaneous forward voltage at 1.0 A(Note1)	$V_F$	0.45	0.55	0.70			0.85			V	
Maximum reverse current at rated DC blocking voltage per diode	@ $T_A=25^\circ C$	0.5									mA
	@ $T_A=100^\circ C$	6.0			5.0						
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	88.0									°C/W
Typical junction capacitance(Note 3)	$C_j$	110			90						pF
Storage Temperature	$T_{STG}$	- 65 ---- + 150									°C
Operation Junction Temperature	$T_j$	- 65 ---- + 125			-65 to +150						°C

**NOTE:**


- 1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
- 2.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES


**FIG. 1- FORWARD CURRENT DERATING CURVE**

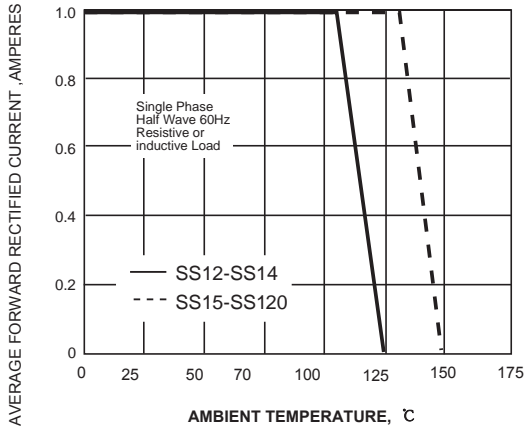


**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

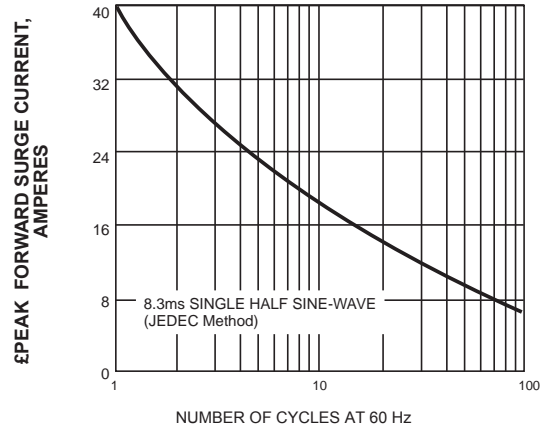


**FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

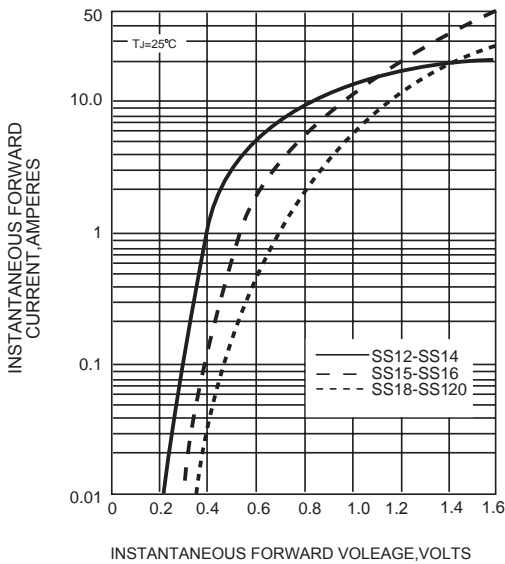

**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

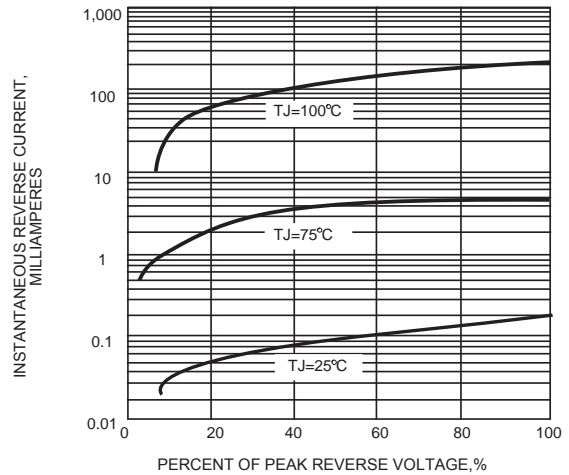

**FIG. 5-TYPICAL JUNCTION CAPACITANCE**

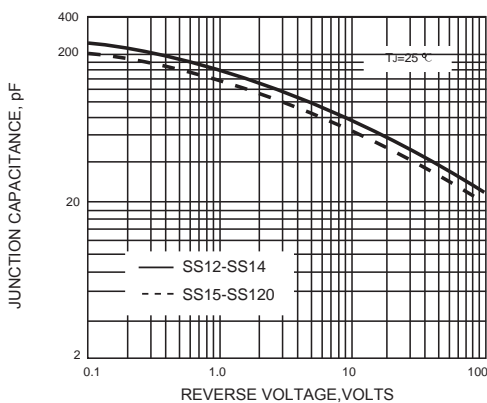

**FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE**

